

PHOTOVOLTAIC MODULE

BPM60 RED

290 W



BACKSHEET WHITE




FRAME RED

TYPE
MONO

QTY
60 pcs (6x10)

DIMENSIONS
158.75 x 158.75 mm | 6.3" x 6.3"

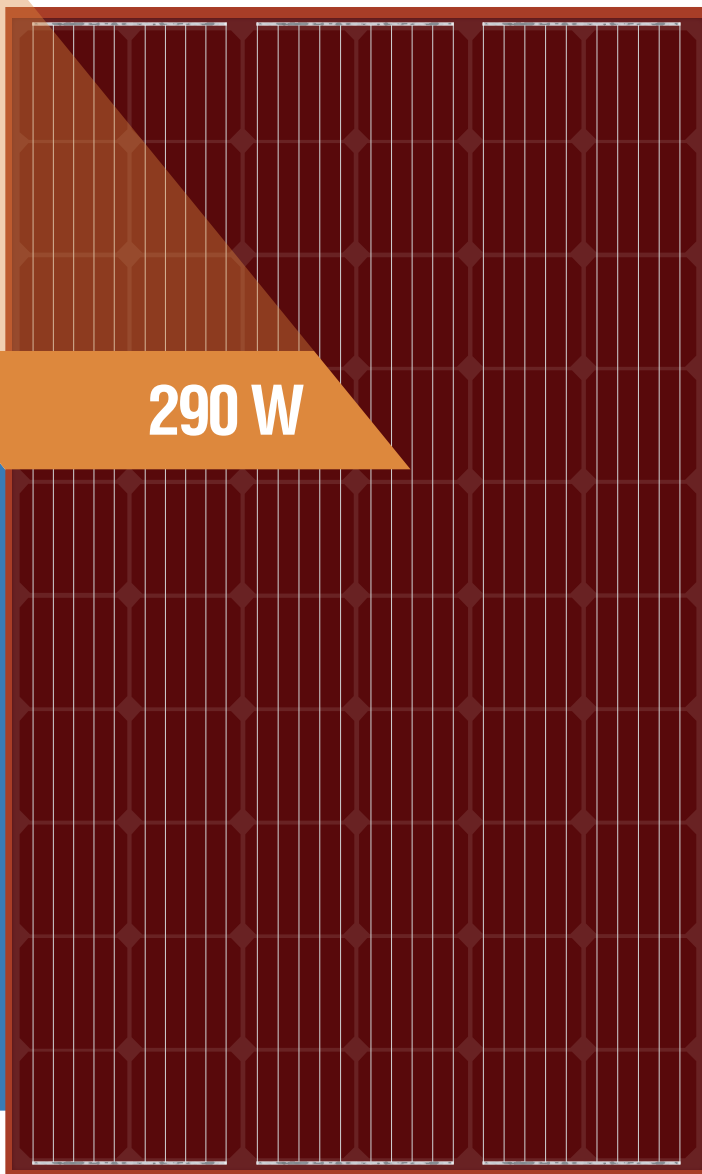

MADE IN ITALY



EXCELLENT PERFORMANCE UNDER DIFFERENT
LIGHT CONDITIONS



POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp



IP67 JUNCTION BOX



COMPACT AND ULTRA-LIGHT ALUMINUM FRAME
THICKNESS: 40mm



LINEAR PERFORMANCE WARRANTY
20 YEARS PRODUCT WARRANTY
30 YEARS LINEAR POWER WARRANTY

THE STRENGTHS OF SOLARDAY® MODULES
ARE ACHIEVED BY HIGH QUALITY PRIME
MATERIAL AND PRODUCTION 100% MADE IN
ITALIAN FACILITIES®.

ECOEM | CE |


UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI EN BS OHSAS 18001:2007



WWW.SOLARDAY.IT | INFO@SOLARDAY.IT

CHARACTERISTICS

Length:	1665 mm
Width:	1002 mm
Thickness:	40 mm
Weight:	19 Kg
Materials of Cells	Monocrystalline Silicon
Dimensions of Cells	158.75 x 158.75 mm
Qty of Cells:	60 (6x10)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant	EVA (Etilen Vinil Acetato)
Backsheet:	PET/PPE
Frame:	Anodized aluminum 15 micron - RAL 8015
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors	MC4 or compatible connector
Cables:	Unipolar Type, Length 900mm - Sec: 4.0 mm ²

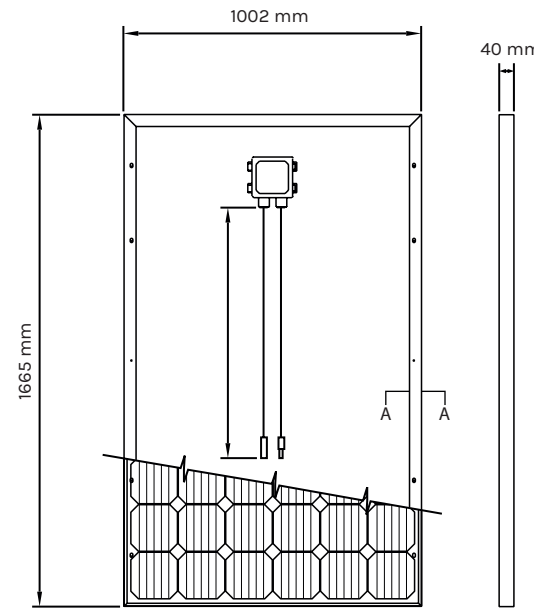

PACKAGING

Pallet Dimensions:	1700x1100x1200 mm (possibility to stack up to two)
PCS for Pallet:	27 pcs
Weight	540 Kg

ELECTRICAL CHARACTERISTICS*

		290W
Nominal Output(0/+4.99W):	Pmax (W)	290
Max. Voltage:	Vmpp (V)	32.74
Max. Current:	Impp (A)	8.88
Open Circuit Voltage:	Voc (V)	39.96
Short Circuit Current:	Isc (A)	9.40
Max. System Voltage:	V	1500
Module Efficiency:	%	17.38

*STC:1000W/mq - AM 1,5 - 25°C

TEMPERATURE CHARACTERISTICS


Temperature Coeff. of Voc:	-0,31 % / °C
Temperature Coeff. of Isc:	+0,04 % / °C
Coeff. Temperatura Pmax:	-0,39 % / °C
NOCT:	43 ± 2 °C

OPERATIVE CHARACTERISTICS

Operating Temperature:	From -40 °C to +85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 55 mm, 86 Kg/h
Fire Test MST 23:	Class C

CURRENT/VOLTAGE CHARACTERISTICS

VALUES APPLY TO MODULE 290W

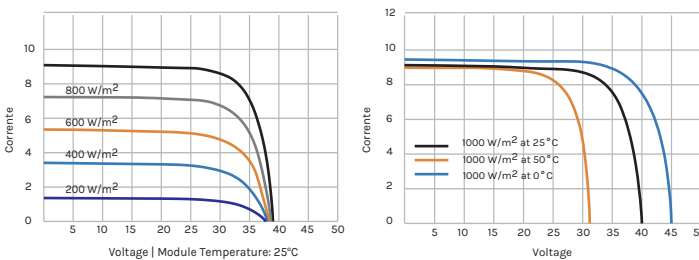

LINEAR PERFORMANCE WARRANTY

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

