

PHOTOVOLTAIC MODULE

BPM60 ALL BLACK



BACKSHEET

back: BLACK/WHITE



front: BLACK



FRAME BLACK

TYPE
MONO

QTY
60 pcs (6x10)

DIMENSIONS
158.75 x 158.75 mm | 6.25 x 6.25"

315 - 325 W



MADE IN ITALY



EXCELLENT PERFORMANCE

UNDER DIFFERENT LIGHT CONDITIONS



POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp



IP67

IP67 JUNCTION BOX



COMPACT AND ULTRA-LIGHT ALUMINUM FRAME
THICKNESS: 40mm



LINEAR PERFORMANCE WARRANTY

30 YEARS LINEAR POWER WARRANTY
20 YEARS PRODUCT WARRANTY

THE STRENGTHS OF SOLARDAY® MODULES ARE
ACHIEVED BY HIGH QUALITY PRIME MATERIALS
AND PRODUCTION 100% MADE IN ITALIAN FACILITIES.

IEC 61215:2005 |
EN 61730-1:2013 | EN 61730-2:2012 |
FIRE TEST MST23 CLASS C
IEC 62716:2013 | IEC 61701:2011
ECOEM | CE |

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI EN BS OHSAS 18001:2007


FACTORY INSPECTION MADE IN EU



WWW.SOLARDAY.IT | INFO@SOLARDAY.IT

CHARACTERISTICS

Length:	1665 mm
Width:	1002 mm
Thickness:	40 mm
Weight:	19 Kg
Material of Cells:	Monocrystalline Silicon PERC
Dimensions of Cells:	158.75 x 158.75 mm
Qty of Cells:	60 (6x10)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant:	EVA (Etilen Vinil Acetato)
Backsheet:	PYE/TPT
Frame:	Anodized aluminum 15 micron
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors:	MC4 or compatible connector
Cables:	Unipolar Type, Length 900mm - Sec: 4.0 mm ²

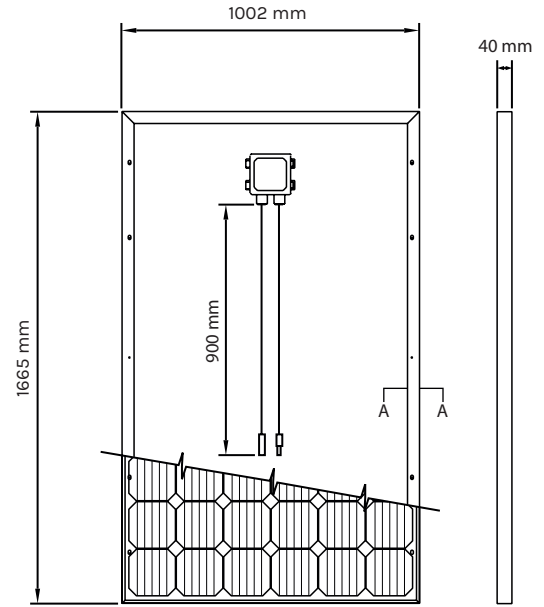

PACKAGING

Pallet Dimensions:	1720x1150x1200 mm (possibility to stack up to two)
Pcs per Pallet:	27 pcs
Weight:	540 Kg

ELECTRICAL CHARACTERISTICS*

		315W	320W	325W
Nominal Output(0/+4.99W):	Pmax (W)	315	320	325
Max. Voltage:	Vmpp (V)	32.65	32.80	32.94
Max. Current:	Impp (A)	9.65	9.76	9.87
Open Circuit Voltage:	Voc (V)	40.29	40.38	40.49
Short Circuit Current:	Isc (A)	10.13	10.23	10.32
Max. System Voltage:	V	1500	1500	1500
Module Efficiency:	%	18.88	19.18	19.48

*STC:1000W/Mq - AM 1,5 - 25°C

TEMPERATURE CHARACTERISTICS


Temperature Coeff. of Voc:	-0,30 % / °C
Temperature Coeff. of Isc:	+0,04 % / °C
Temperature Coeff. of Pmax:	-0,38 % / °C
NOCT:	43 ± 2 °C

OPERATIVE CHARACTERISTICS

Operating Temperature:	From -40 °C to +85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 28 mm, 86 Kg/h
Fire Test MST 23:	Class C

CURRENT/VOLTAGE CHARACTERISTICS

VALUES APPLY TO MODULE 320W

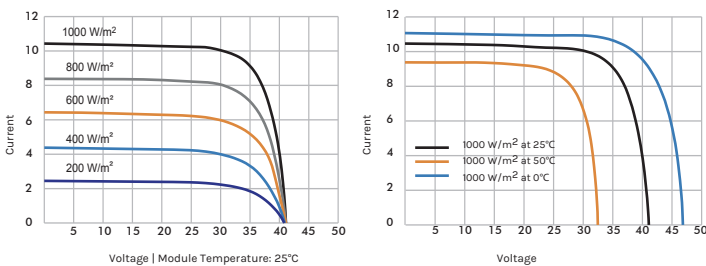

LINEAR PERFORMANCE WARRANTY

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

