

PHOTOVOLTAIC MODULE

# BPM60 RED

290 W



BACKSHEET WHITE




FRAME RED

TYPE  
MONO

60 pcs (6x10)

DIMENSIONS

158.75 x 158.75 mm | 6.3" x 6.3"

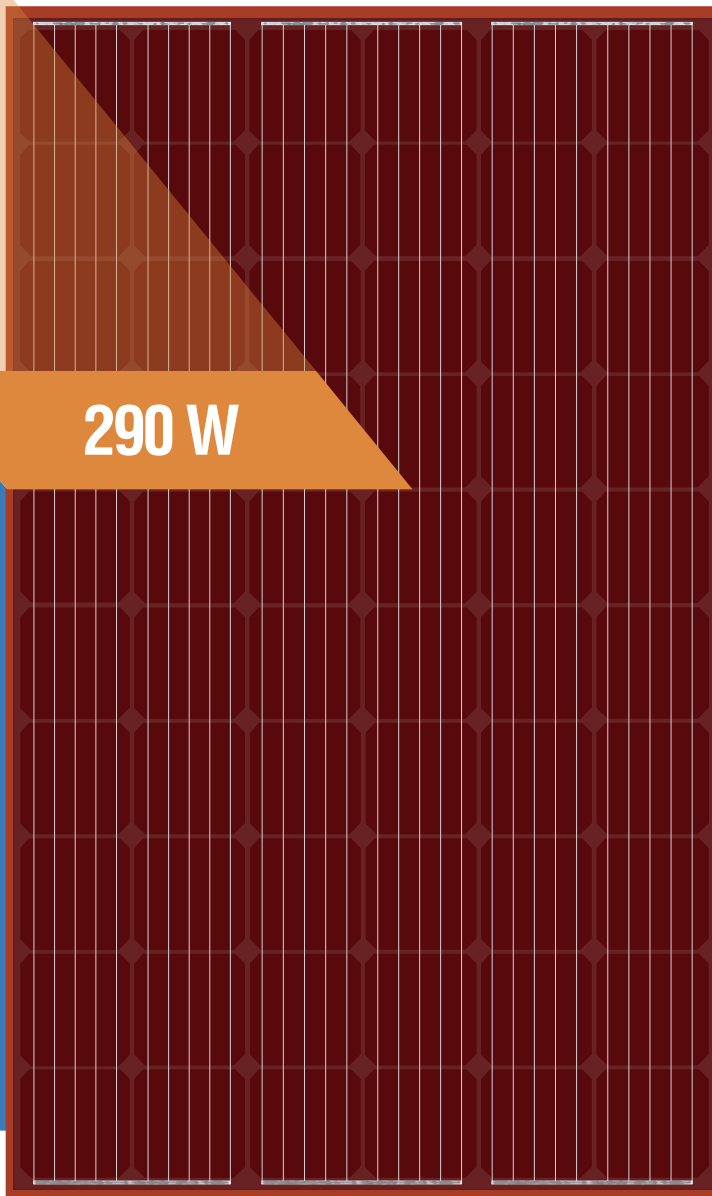

MADE IN ITALY



EXCELLENT PERFORMANCE  
UNDER DIFFERENT LIGHT CONDITIONS



POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp



IP67 JUNCTION BOX



COMPACT AND ULTRA-LIGHT ALUMINUM FRAME  
THICKNESS: 40mm



LINEAR PERFORMANCE WARRANTY

30 YEARS LINEAR POWER WARRANTY  
20 YEARS PRODUCT WARRANTY

THE STRENGTHS OF SOLARDAY® MODULES ARE  
ACHIEVED BY HIGH QUALITY PRIME MATERIALS  
AND PRODUCTION 100% MADE IN ITALIAN FACILITIES.

ECOEM | CE |


UNI EN ISO 9001:2015  
UNI EN ISO 14001:2015  
UNI EN BS OHSAS 18001:2007



WWW.SOLARDAY.IT | INFO@SOLARDAY.IT

**CHARACTERISTICS**

Length:	1665 mm
Width:	1002 mm
Thickness:	40 mm
Weight:	19 Kg
Material of Cells:	Monocrystalline Silicon
Dimensions of Cells:	158.75 x 158.75 mm
Qty of Cells:	60 (6x10)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant:	EVA (Etilen Vinil Acetato)
Backsheet:	PYE/PPE
Frame:	Anodized aluminum 15 micron - RAL 8015
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors:	MC4 or compatible connector
Cables:	Unipolar Type, Length 900mm - Sec: 4.0 mm <sup>2</sup>

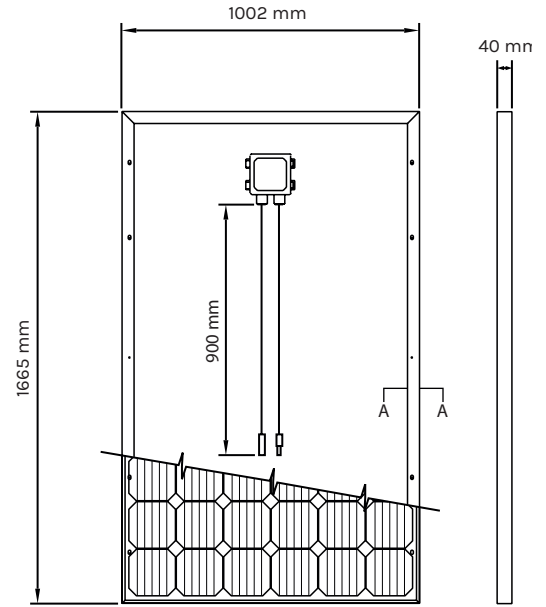

**PACKAGING**

Pallet Dimensions:	1700x1100x1200 mm (possibility to stack up to two)
Pcs per Pallet:	27 pcs
Weight:	540 Kg

**ELECTRICAL CHARACTERISTICS\***

		290W
Nominal Output(0/+4.99W):	Pmax (W)	290
Max. Voltage:	Vmpp (V)	32.74
Max. Current:	Impp (A)	8.88
Open Circuit Voltage:	Voc (V)	39.96
Short Circuit Current:	Isc (A)	9.40
Max. System Voltage:	V	1500
Module Efficiency:	%	17.83

\*STC:1000W/Mq - AM 1,5 - 25°C

**TEMPERATURE CHARACTERISTICS**


Temperature Coeff. of Voc:	-0,31 % / °C
Temperature Coeff. of Isc:	+0,04 % / °C
Temperature Coeff. of Pmax:	-0,39 % / °C
NOCT:	43 ± 2 °C

**OPERATIVE CHARACTERISTICS**

Operating Temperature:	From -40 °C to + 85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 55 mm, 86 Kg/h
Fire Test MST 23:	Class C

**CURRENT/VOLTAGE CHARACTERISTICS**

VALUES APPLY TO MODULE 290W

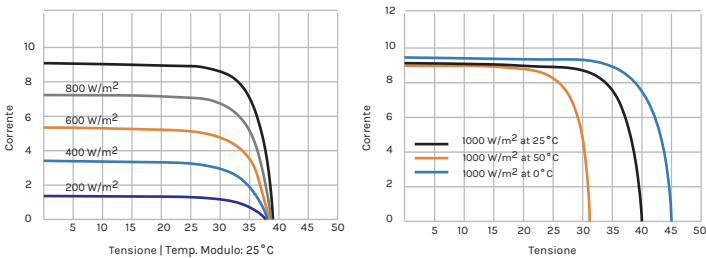

**LINEAR PERFORMANCE WARRANTY**

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

