

PHOTOVOLTAIC MODULE

BPM60 GREEN

290 W



BACKSHEET WHITE



FRAME GREEN

TYPE


MONO 5BB M3

QTY

60 pcs (6x10)

DIMENSIONS CELLE

158.75 x 158.75 mm | 6.3" x 6.3"

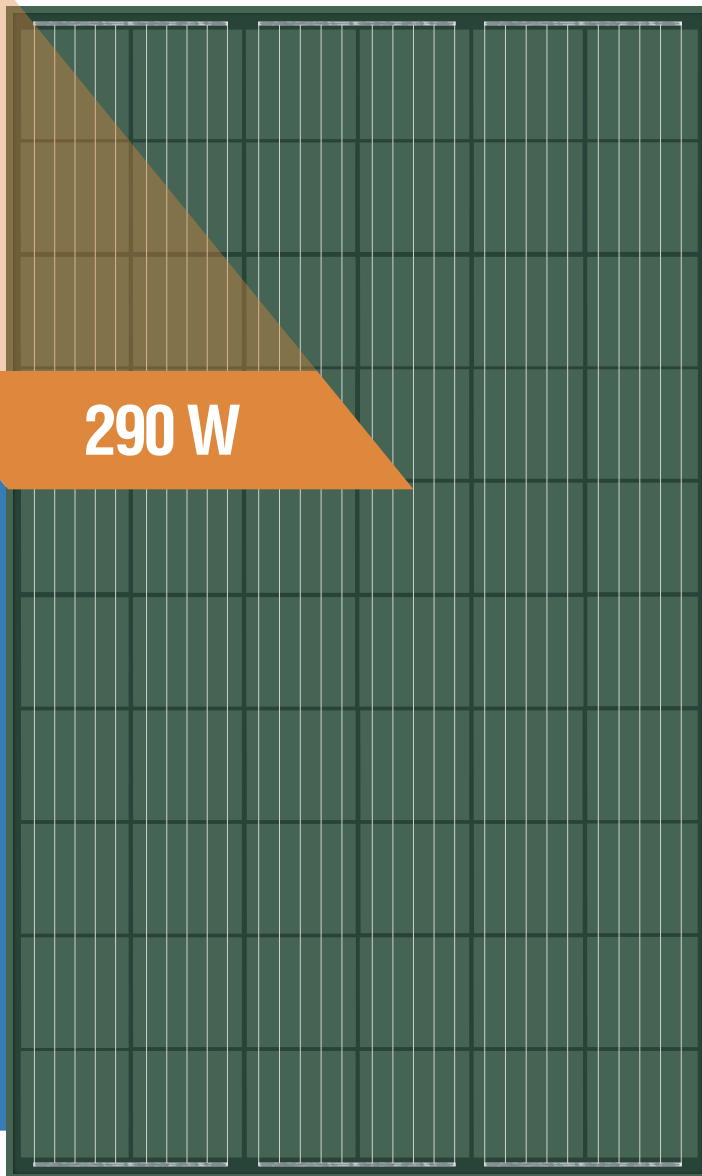

MADE IN ITALY



EXCELLENT PERFORMANCE
UNDER DIFFERENT LIGHT CONDITIONS



POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp



IP67

IP67 JUNCTION BOX



COMPACT AND ULTRA-LIGHT **ALUMINUM FRAME**
THICKNESS: 40mm



LINEAR PERFORMANCE WARRANTY

30 YEARS LINEAR POWER WARRANTY
20 YEARS PRODUCT WARRANTY

THE STRENGTHS OF SOLARDAY® MODULES ARE ACHIEVED BY HIGH QUALITY PRIME MATERIALS AND PRODUCTION 100% MADE IN ITALIAN FACILITIES.

CERTIFICATIONS:

ECOEM | CE

UNI EN ISO 9001:2015

UNI EN ISO 14001:2015

UNI EN BS OHSAS 18001:2007


UNI EN ISO 45001:2018



WWW.SOLARDAY.IT | INFO@SOLARDAY.IT

CHARACTERISTICS

Length:	1665 mm
Width:	1002 mm
Thickness:	40 mm
Weight:	19 Kg
Material of Cells:	M3 Monocrystalline Silicon PERC
Dimensions of Cells:	158.75 x 158.75 mm
Qty of Cells:	60 (6x10)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant:	EVA (Etilen Vinil Acetato)
Backsheet:	PYE/PPE
Frame:	Anodized aluminum 15 micron - RAL 6007
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors:	MC4 or compatible connector
Cables:	Unipolar Type, Length 900 mm - Sez: 4,0 mm ²

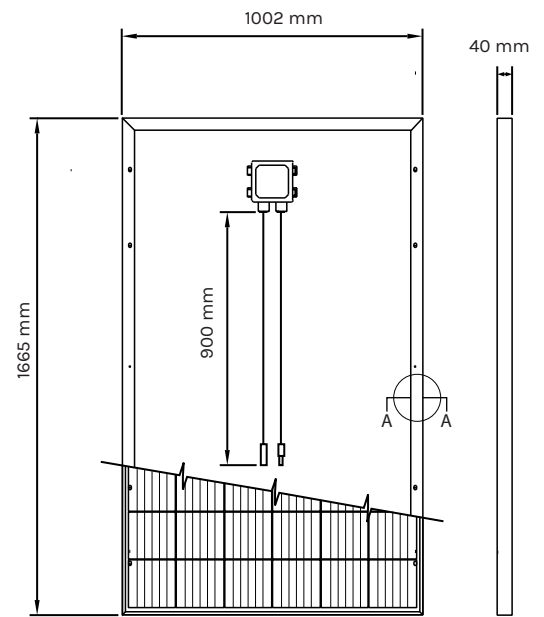

PACKAGING

Pallet Dimensions:	1700x1100x1200 mm (possibility to stack up to two)
Pcs per Pallet:	27 pcs
Weight:	540 Kg

ELECTRICAL CHARACTERISTICS*

		290W
Nominal Output(0/+4.99W):	Pmax (W)	290
Max. Voltage:	Vmpp (V)	32.74
Max. Current:	Impp (A)	8.88
Open Circuit Voltage:	Voc (V)	39.96
Short Circuit Current:	Isc (A)	9.40
Max. System Voltage:	V	1500
Module Efficiency:	%	17.83
Maximum nominal amperage value of fuse:	A	15

*STC:1000W/Mq - AM 1,5 - 25°C

TEMPERATURE CHARACTERISTICS


Temperature Coeff. of Voc:	-0,31 % / °C
Temperature Coeff. of Isc:	+0,04 % / °C
Temperature Coeff. of Pmax:	-0,39 % / °C
NOCT:	43 ± 2 °C

OPERATIVE CHARACTERISTICS

Operating Temperature:	From -40 °C to + 85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 55 mm, 86 Kg/h
Fire Test MST 23:	Class C


CURRENT/VOLTAGE CHARACTERISTICS

VALUES APPLY TO MODULE 290W

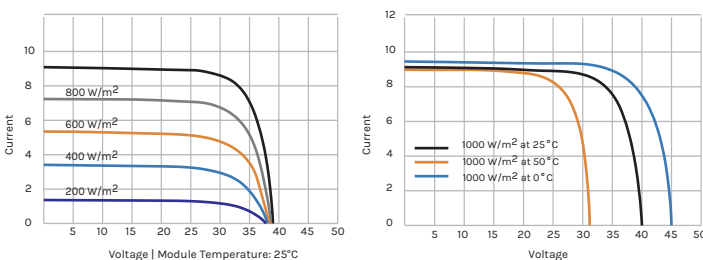

LINEAR PERFORMANCE WARRANTY

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

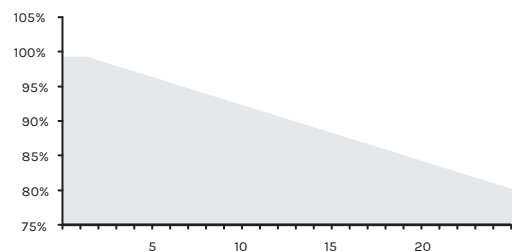

FOR MORE DETAILED INSTRUCTIONS, SEE THE INSTALLATION MANUAL

