

PHOTOVOLTAIC MODULE
BPM72

 **BACKSHEET WHITE**


 **FRAME SILVER**

TYPE
MONO 5BB M3 PERC

QTY
72 pcs (6x12)


DIMENSIONS
158.75 x 158.75 mm | 6.25 x 6.25"


390 - 400 W

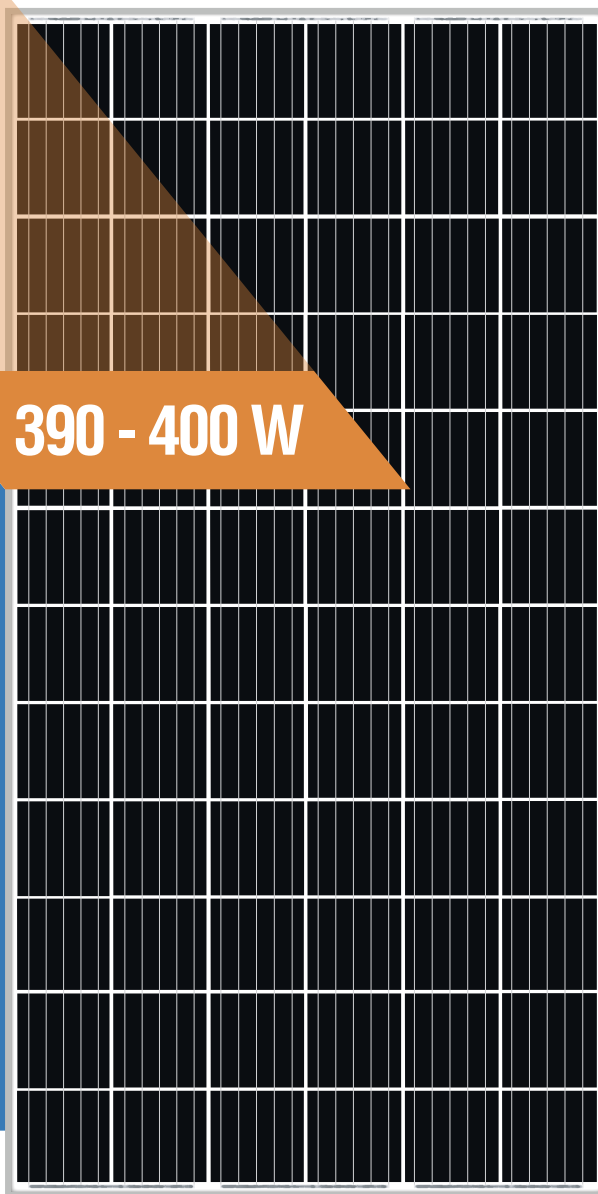


 **MADE IN ITALY**

 **EXCELLENT PERFORMANCE**
UNDER DIFFERENT LIGHT CONDITIONS

 **POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp**

 **IP67 JUNCTION BOX**

 **COMPACT AND ULTRA-LIGHT ALUMINUM FRAME**
THICKNESS: 40mm

 **LINEAR PERFORMANCE WARRANTY**
30 YEARS LINEAR POWER WARRANTY
20 YEARS PRODUCT WARRANTY

THE STRENGTHS OF SOLARDAY® MODULES ARE ACHIEVED BY HIGH QUALITY PRIME MATERIALS AND PRODUCTION 100% MADE IN ITALIAN FACILITIES.

CERTIFICATIONS:

IEC 61215:2016
EN 61730-1:2016 | EN 61730-2:2016
FIRE TEST MST23 CLASS C
IEC 62716:2013 | IEC 61701:2011
ECOEM | CE

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI EN BS OHSAS 18001:2007
UNI EN ISO 45001:2018


FACTORY INSPECTION MADE IN EU



WWW.SOLARDAY.IT | INFO@SOLARDAY.IT

CHARACTERISTICS

Length:	1979 mm
Width:	1002 mm
Thickness:	40 mm
Weight:	22 Kg
Material of Cells:	M3 Monocrystalline Silicon PERC
Dimensions of Cells:	158.75 x 158.75 mm
Qty of Cells:	72 (6x12)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant:	EVA (Etilen Vinil Acetato)
Backsheet:	PYE/TPT
Frame:	Anodized aluminum 15 micron
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors:	MC4 or compatible connector
Cables:	Unipolar Type, Length 1200mm - Sec: 4.0 mm ²

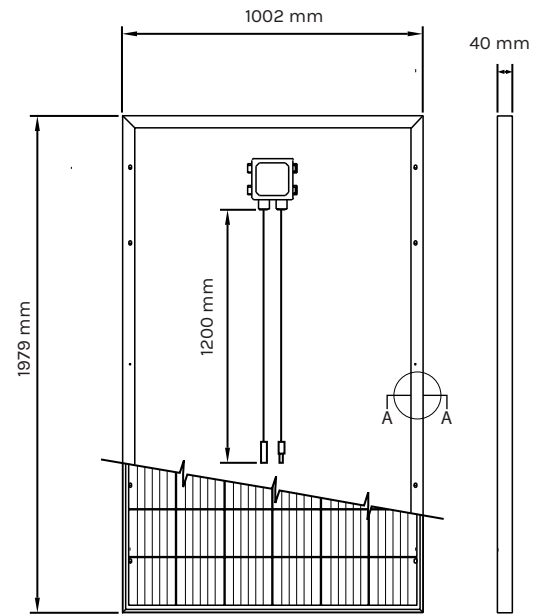

PACKAGING

Pallet Dimensions:	2000x1200x1210 mm (possibility to stack up to two)
Pcs per Pallet:	27 pcs
Weight:	630 Kg

ELECTRICAL CHARACTERISTICS*

		390W	395W	400W
Nominal Output(0/+4.99W):	Pmax (W)	390	395	400
Max. Voltage:	Vmpp (V)	40.69	40.81	41.30
Max. Current:	Impp (A)	9.59	9.68	9.69
Open Circuit Voltage:	Voc (V)	49.92	50.08	50.39
Short Circuit Current:	Isc (A)	10.06	10.16	10.26
Max. System Voltage:	V	1500	1500	1500
Module Efficiency:	%	19.67	19.92	20.17
Maximum nominal amperage value of fuse:	A	15	15	15

*STC:1000W/Mq - AM 1,5 - 25°C

TEMPERATURE CHARACTERISTICS


Temperature Coeff. of Voc:	-0,28 % / °C
Temperature Coeff. of Isc:	+0,042 % / °C
Temperature Coeff. of Pmax:	-0,37 % / °C
NOCT:	45 ± 2 °C

OPERATIVE CHARACTERISTICS

Operating Temperature:	From -40 °C to + 85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 28 mm, 86 Kg/h
Fire Test MST 23:	Class C


CURRENT/VOLTAGE CHARACTERISTICS

VALUES APPLY TO MODULE 400W

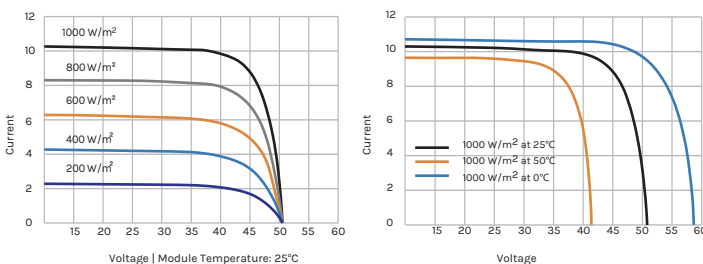

LINEAR PERFORMANCE WARRANTY

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

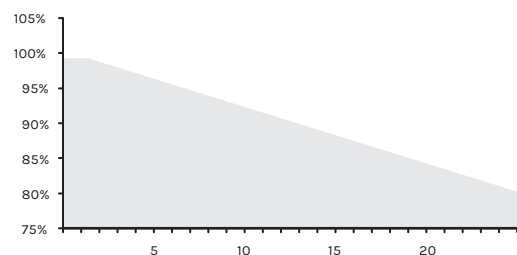

FOR MORE DETAILED INSTRUCTIONS, SEE THE INSTALLATION MANUAL

