

PHOTOVOLTAIC MODULE

PX60



BACKSHEET WHITE



FRAME SILVER

TYPE

POLY 5BB


QTY

60 pcs (6x10)

DIMENSIONS

156.75 x 156.75 mm | 6.25 x 6.25"

280 - 285 W

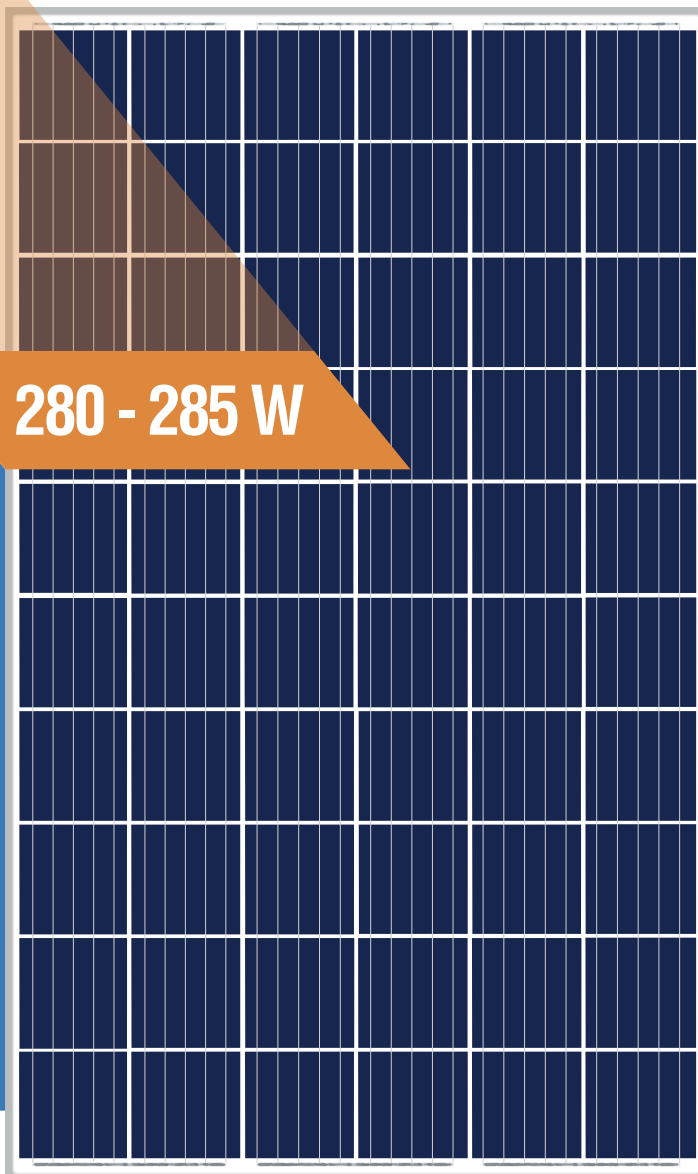

MADE IN ITALY



EXCELLENT PERFORMANCE
UNDER DIFFERENT LIGHT CONDITIONS



POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp



IP67 JUNCTION BOX



COMPACT AND ULTRA-LIGHT ALUMINUM FRAME
THICKNESS: 40mm



LINEAR PERFORMANCE WARRANTY

30 YEARS LINEAR POWER WARRANTY
20 YEARS PRODUCT WARRANTY

THE STRENGTHS OF SOLARDAY® MODULES ARE ACHIEVED BY HIGH QUALITY PRIME MATERIALS AND PRODUCTION 100% MADE IN ITALIAN FACILITIES.

CERTIFICATIONS:

IEC 61215:2016
EN 61730-1:2016 | EN 61730-2:2016
FIRE TEST MST23 CLASS C
IEC 62716:2013 | IEC 61701:2011
ECOEM | CE

UNI EN ISO 9001:2015
UNI EN ISO 14001:2015
UNI EN BS OHSAS 18001:2007
UNI EN ISO 45001:2018


FACTORY INSPECTION MADE IN EU



WWW.SOLARDAY.IT | INFO@SOLARDAY.IT

CHARACTERISTICS

Length:	1640 mm
Width:	992 mm
Thickness:	40 mm
Weight:	19 Kg
Material of Cells:	Polycrystalline Silicon
Dimensions of Cells:	156.75 x 156.75 mm
Qty of Cells:	60 (6x10)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant:	EVA (Etilen Vinil Acetato)
Backsheet:	PYE/PPE
Frame:	Anodized aluminum 15 micron
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors:	MC4 or compatible connector
Cables:	Unipolar Type, Length 900mm - Sec: 4.0 mm ²

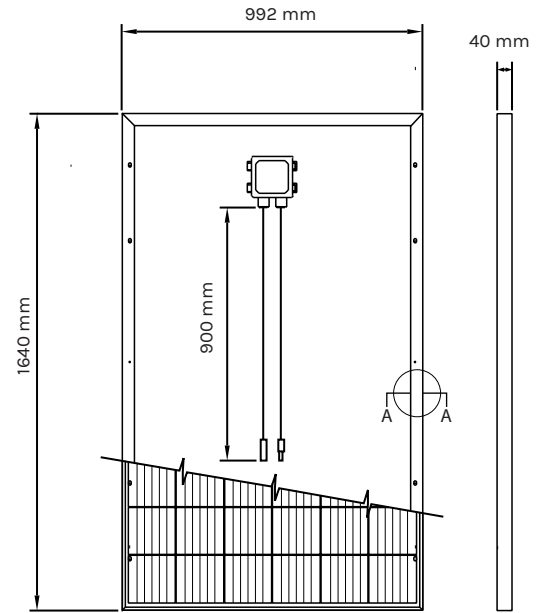

PACKAGING

Pallet Dimensions:	1700x1100x1200 mm (possibility to stack up to two)
Pcs per Pallet:	27 pcs
Weight:	516 Kg

ELECTRICAL CHARACTERISTICS*

		280W	285W
Nominal Output(0/+4.99W):	Pmax (W)	280	285
Max. Voltage:	Vmpp (V)	31.61	31.74
Max. Current:	Impp (A)	8.86	8.98
Open Circuit Voltage:	Voc (V)	38.68	38.79
Short Circuit Current:	Isc (A)	9.35	9.46
Max. System Voltage:	V	1500	1500
Module Efficiency:	%	17.21	17.52
Maximum nominal amperage value of fuse:	A	15	15

*STC:1000W/Mq - AM 1,5 - 25°C

TEMPERATURE CHARACTERISTICS


Temperature Coeff. of Voc:	-0,34 % / °C
Temperature Coeff. of Isc:	+0,04 % / °C
Temperature Coeff. of Pmax:	-0,43 % / °C
NOCT:	43 ± 2 °C

OPERATIVE CHARACTERISTICS

Operating Temperature:	From -40 °C to + 85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 28 mm, 86 Kg/h
Fire Test MST 23:	Class C


CURRENT/VOLTAGE CHARACTERISTICS

VALUES APPLY TO MODULE 285W

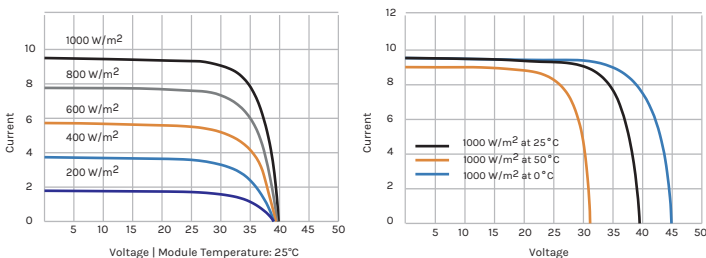

LINEAR PERFORMANCE WARRANTY

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

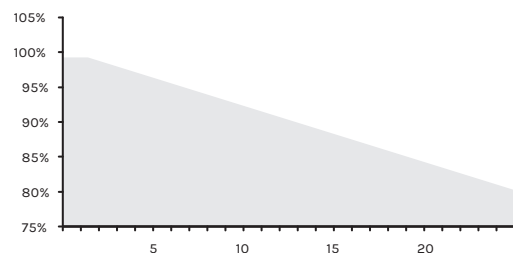

FOR MORE DETAILED INSTRUCTIONS, SEE THE INSTALLATION MANUAL

