

PHOTOVOLTAIC MODULE

# PX72



BACKSHEET WHITE



FRAME SILVER

**TYPE**

POLY 5BB


**QTY**

72 pcs (6x12)

**DIMENSIONS**

156.75 x 156.75 mm | 6.25 x 6.25"

340 W

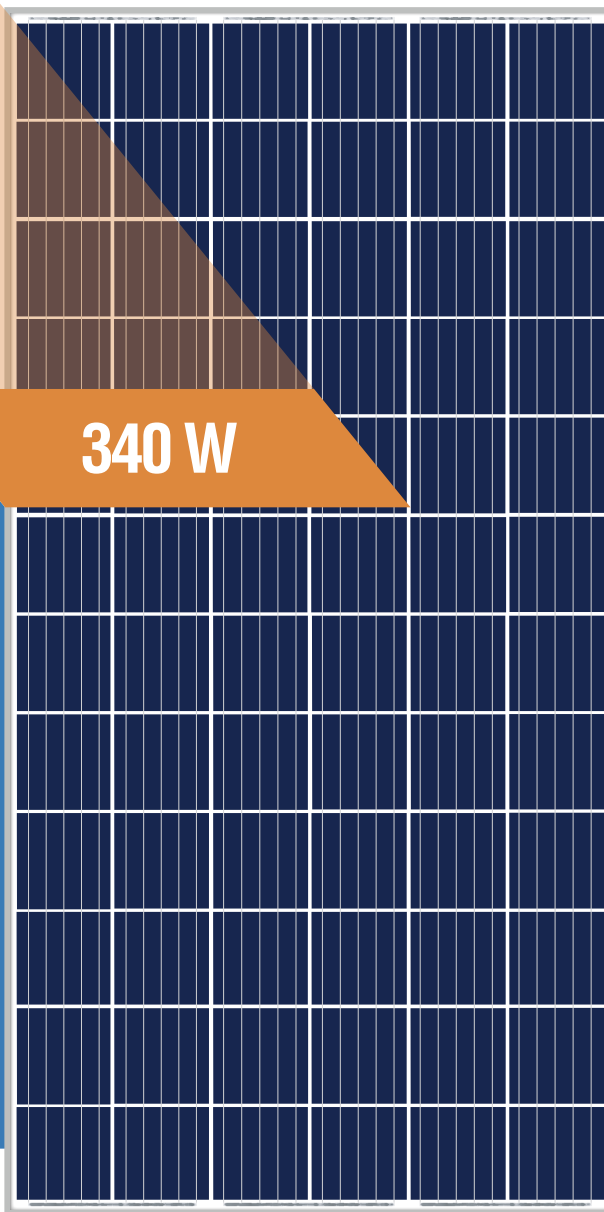

**MADE IN ITALY**



**EXCELLENT PERFORMANCE**  
UNDER DIFFERENT LIGHT CONDITIONS



**POSITIVE POWER OUTPUT TOLERANCE 0/+5 Wp**



**IP67 JUNCTION BOX**



**COMPACT AND ULTRA-LIGHT ALUMINUM FRAME**  
THICKNESS: 40mm



**LINEAR PERFORMANCE WARRANTY**

**30 YEARS LINEAR POWER WARRANTY**  
**20 YEARS PRODUCT WARRANTY**

THE STRENGTHS OF SOLARDAY® MODULES ARE ACHIEVED BY HIGH QUALITY PRIME MATERIALS AND PRODUCTION 100% MADE IN ITALIAN FACILITIES.

**CERTIFICATIONS:**

IEC 61215:2016  
EN 61730-1:2016 | EN 61730-2:2016  
FIRE TEST MST23 CLASS C  
IEC 62716:2013 | IEC 61701:2011  
ECOEM | CE

UNI EN ISO 9001:2015  
UNI EN ISO 14001:2015  
UNI EN BS OHSAS 18001:2007  
UNI EN ISO 45001:2018


**FACTORY INSPECTION MADE IN EU**



[WWW.SOLARDAY.IT](http://WWW.SOLARDAY.IT) | [INFO@SOLARDAY.IT](mailto:INFO@SOLARDAY.IT)

### CHARACTERISTICS

Length:	1956 mm
Width:	992 mm
Thickness:	40 mm
Weight:	22.5 Kg
Material of Cells:	Polycrystalline Silicon
Dimensions of Cells:	156.75 x 156.75 mm
Qty of Cells:	72 (6x12)
Frontal Glass:	Glass with low iron content, thickness 3.2 mm
Encapsulant:	EVA (Etilen Vinil Acetato)
Backsheet:	PYE/PPE
Frame:	Anodized aluminum 15 micron
Junction Box:	1 Junction box IP67 - 1500 V with 3 by pass diodes
Connectors:	MC4 or compatible connector
Cables:	Unipolar Type, Length 900mm - Sec: 4.0 mm <sup>2</sup>

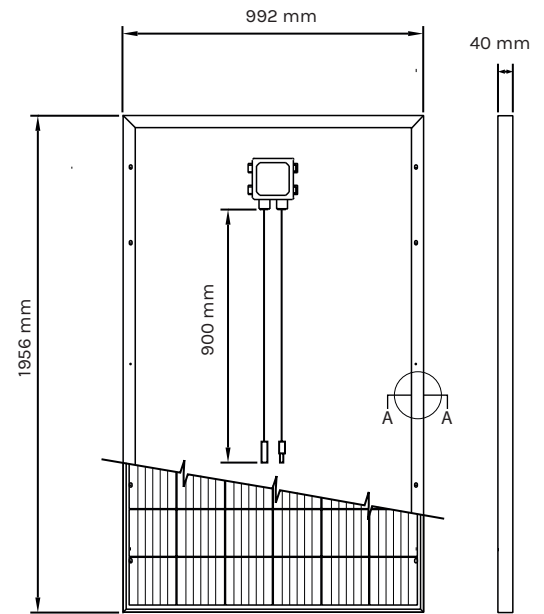

### PACKAGING

Pallet Dimensions:	2000x1100x1200 mm (possibility to stack up to two)
Pcs per Pallet:	27 pcs
Weight:	622 Kg

### ELECTRICAL CHARACTERISTICS\*

		340W
Nominal Output(0/+4.99W):	Pmax (W)	340
Max. Voltage:	Vmpp (V)	38.29
Max. Current:	Imp (A)	8.88
Open Circuit Voltage:	Voc (V)	47.05
Short Circuit Current:	Isc (A)	9.37
Max. System Voltage:	V	1500
Module Efficiency:	%	17.52
Maximum nominal amperage value of fuse:	A	15

\*STC:1000W/Mq - AM 1,5 - 25°C

### TEMPERATURE CHARACTERISTICS


Temperature Coeff. of Voc:	-0,34 % / °C
Temperature Coeff. of Isc:	+0,04 % / °C
Temperature Coeff. of Pmax:	-0,43 % / °C
NOCT:	43 ± 2 °C

### OPERATIVE CHARACTERISTICS

Operating Temperature:	From -40 °C to + 85 °C
Max. Superficial Load:	Over 5400 Pa
Hailstorm Resistance:	Ø 28 mm, 86 Kg/h
Fire Test MST 23:	Class C


### CURRENT/VOLTAGE CHARACTERISTICS

VALUES APPLY TO MODULE 340W

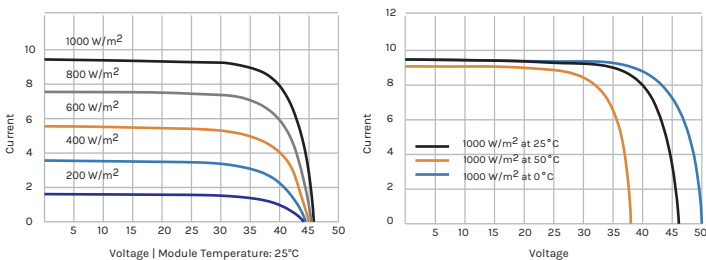

### LINEAR PERFORMANCE WARRANTY

20 YEARS Product Warranty | 30 YEARS Linear Power Warranty

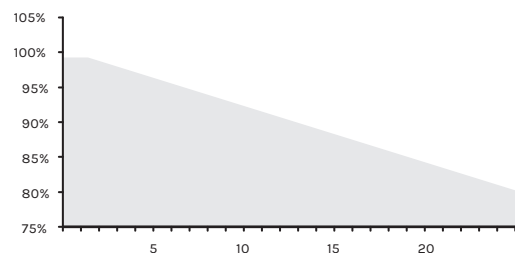

FOR MORE DETAILED INSTRUCTIONS, SEE THE INSTALLATION MANUAL

